



# Commpacting airlaid dust

Increasing density. Minimizing dust and lowering danger of fire.


## SK370

- Save space by reducing the volume dramatically
- Designed to work in automatic line 24 hours per day, 7 days per week




Production Data	Europe	USA
Capacity per hour	App. 7-800 kg	App. 1500-1700 lbs
Density achieved	Up to 750 kg/m <sup>3</sup>	Up to 1650 lbs.
Energy consumption	Europe	USA
Main motor	15 kW	24 HP (18 kW)
Hydraulic pump	0,55 kW	0.88 HP (0.66 kW)
Electrical requirements	Europe	USA
3 phase 400V; 50 Hz	63 AMPS	
3 phase 480V; 60 Hz		63 AMPS
3 phase 230V; 60 Hz		80 AMPS
Dimensions: 5000008911	Europe	USA
Length	7,17 m	23 ft 6 inch
Width	0,63 m	4 ft 3 inch
Height	2,25 m	6 ft 6 inch
Weight	App. 1500 kg	App. 3300 lbs

The SK370 is placed under a cyclone or rotating level sensor



5000007888

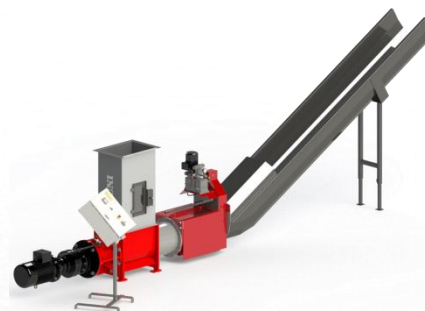

5000008911